

技術規格 Specifications

型號 Model	FZFC100-04B	FZFC100-06B	FZFC200-06B	FZFC200-08B
適合管子外徑(mm) Applicable tube O.D.	Φ4	Φ6	Φ6	Φ8
流量(l/min) Flow (l/min)	10	20	30	50
使用液體 Fluid	空氣、氮氣 Air、Nitrogen			
使用壓力範圍 Operating pressure	-100~0kPa			
過濾精度 Filtration degree	10 μm			
環境及液體溫度 Operating and ambient temperature range	0~60°C(但未凍結 with no freezing)			
濾芯耐壓差 Element differential pressure resistance	1.5bar			
適合軟管材料 Applicable tubing material	尼龍、軟尼龍、PU軟管、極軟PU管 Nylon, Soft nylon, polyurethane, Soft polyurethane			
濾芯(備件) Filter element(spare parts)	FC-100		FC-200	



產品特點 Features

- ◇ 體積小、重量輕
Compact and low weight design
- ◇ 快換接頭式，配置方便快捷
One-touch quick fitting and convenient assembly
- ◇ 濾芯可以更換
Filter element is replaceable
- ◇ 採用快捷的裝拆結構，不需要工具便可更換濾芯
Adopt easy assembled and disassemble structure filter element can be replaced without tools
- ◇ 直通型，進口與出口在同一條線上，安裝方便
Straight through type, inlet and outlet are in the same line, it is easy to assemble
- ◇ 標準型帶托架
Standard type is with bracket

訂購碼 How to order

FZFC 100 - 04 B

- ① 真空流量 Recommend flow rate


100	最大20l/min Max.20l/min
200	最大50l/min Max.50l/min

- ② IN·OUT適合管子外徑


記號 Symbol	管子外徑 Tube O.D.	適合系列 Applicable model
04	Φ4	AZFC100
06	Φ6	AZFC100 AZFC200
08	Φ8	AZFC200

- ③ 帶托架 With bracket

圖形符號 Symbol




外形尺寸(mm) Dimensions (mm)

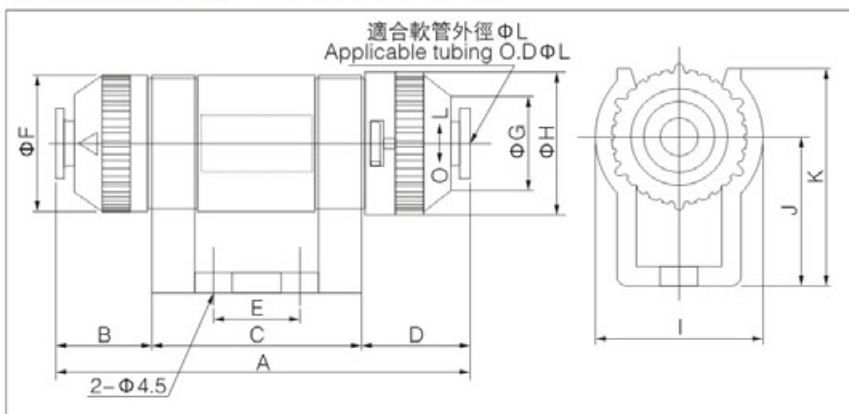

型號 Model	FZFC-100-04B	FZFC-100-06B	FZFC-200-06B	FZFC-200-08B
A	53.2	53.2	67	67
B	9.1	9.1	15.5	15.5
C	30	30	34	34
D	14.1	14.1	17.5	17.5
E	10	10	14	14
F	18	18	22	22
G	11.6	11.6	15.6	15.6
H	19.5	19.5	23.1	23.1
I	23	23	27	27
J	20	20	24	24
K	29	29	35	35
L	4	6	6	8

應用例 Application Example

- 真空產生器系統應用

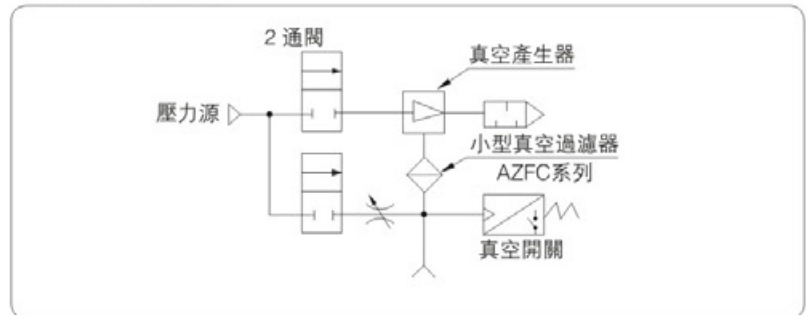

- 真空泵系統應用

